



6106

Fiberglass Stepladders

6 to 8 ft.

- Type I, load capacity 300 lbs
- Convenient tray for tools
- Braces on top and bottom steps and horizontals

6106 6' FG Stepladder
6108 8' FG Stepladder



Fiberglass Stepladders

4 to 12 ft.

- Type IA, load capacity 300 lbs
- EDGE® molded brace and foot pad combination provides enhanced bracing strength and increased protection against damage
- Shoe pads riveted to the EDGE® structure
- Top steps and rear horizontals are knee-braced

6204 4' FG Stepladder
6206 6' FG Stepladder
6208 8' FG Stepladder
6210 10' FG Stepladder
6212 12' FG Stepladder

USA Fiberglass Stepladders

- Type IA, load capacity 300 lbs
- Fibergraphix - Proudly made in the U.S.A.
- Knee-braced top step and full set of rear horizontal
- Heavy duty internal spreaders

USA06 6' FG Stepladder
USA08 8' FG Stepladder



T7406

Twin Step Fiberglass Stepladders

- Type IAA, load capacity 375 lbs
- Glas*Mark® violator stripes on rails allow ladder to be more visible
- Aluminum external rail shield helps protect against abrasion damage
- Heavy gauge aluminum top
- Back-up aluminum plates reinforce all top connectors

T7404 4' Twin Step FG Stepladder, Type 1AA 375 lbs.
T7406 6' Twin Step FG Stepladder, Type 1AA 375 lbs.
T7408 8' Twin Step FG Stepladder, Type 1AA 375 lbs.
T7414 14' Twin Step FG Stepladder, Type 1AA 375 lbs.

- EDGE molded brace and foot pad combination provides enhanced bracing strength and increased protection against damage

T6206 6' Twin Step FG Stepladder Type 1A 300 lbs.



Aluminum Extension Ladders


- Type IA, load capacity 300 lbs
- Exclusive Alflo® rung joint means Twist-Proof® performance
- Rugged shoe rest flat or is held in spur position with Shu-Lok® feature

D1520-2 20' Aluminum Extension Ladder
D1524-2 24' Aluminum Extension Ladder, Type 1A 300 lbs.
D1528-2 28' Aluminum Extension Ladder

Fiberglass Extension Ladders

- Exclusive Alflo rung joint means twist proof performance
- Type IA, load capacity 300 lbs
- Pre-pierced holes for easy field installation of accessories
- External guides at top of base section securely interlock rails
- Heavy duty pulley with rope
- Internal guides on bottom of fly section securely interlocks rails
- Molded rung braces

D6216-2 16' FG Ext Ladder
D6220-2 20' FG Ext Ladder
D6224-2 24' FG Ext Ladder
D6228-2 28' FG Ext Ladder
D6232-2 32' FG Ext Ladder
D6240-2 40' FG Ext Ladder

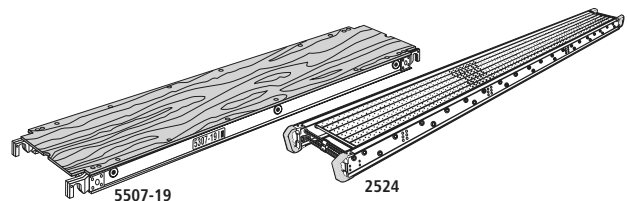

Stage & Planks

- Includes set of double rungs at the end of stage

2524 20" x 24' Long Stage, 500 lbs. load cap., 2 person rated
5507-19 7' Aluminum Plank
5307-19 7' Plywood Plank
5310-19 10' Plywood Plank