

VEST & HARNESS

FALL PROTECTION

Tracvest and Versafit Vest Style Harness by Tractel

The Tracvest offers the user lightweight construction, flexibility, and comfort as well as visibility. The detachable liner provides a means of easy inspection and replacement of the integrated harness. Comes in black or orange. The Versafit harness has adjustable leg, shoulder, chest and sub-pelvic straps which can be adjusted to a perfect fit for maximum comfort.




Vest

Features:

- Removable snapped lining
- Made of lightweight mesh material
- Frontal and dorsal scotch lite reflective material
- Frontal side pockets closed with snap
- Lanyard clip holder and extended dorsal keeper
- Washable
- Orange or Black

Black #VTB600

Orange #VTO610

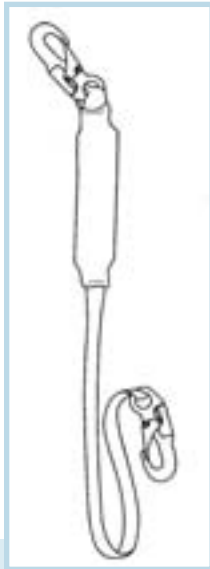


Lanyard

6' x 1 in. shock-absorbing lanyard with a 3/4 in. self-locking snap hook at both ends; This Fallstop Shock-Absorbing Lanyard is made of a 1 in. lightweight continuous web and the shock absorber is covered with a tubular sleeve.

Applicable standards

- ANSI Z359.1
- ANSI A10.14
- OSHA fall protection requirements

#LY615

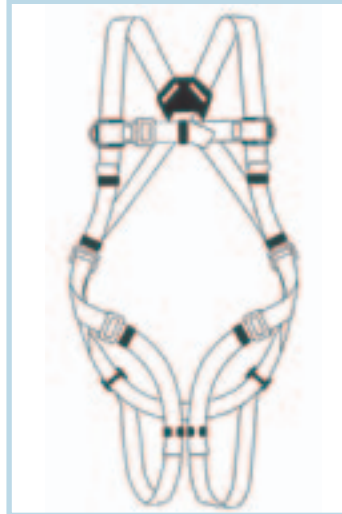

Fall Harness

Features:

- Adjustable sub-pelvic strap
- Five-point adjustment
- Adjustable back D-ring
- Lanyard retaining clips on both shoulder straps
- Fall indicators/inspection tag/serial number
- Accommodates tool belt up to four inches wide
- Ideal for use with Tracvest
- Two colors: blue shoulder straps and gray leg straps
- Capacity 310 lbs. (140 Kg), One Person


#HS610

Applicable Standards

- ANSI Z359.1
- OSHA fall protection requirements

SAFETY LINES & ROPE GRABS

FALL PROTECTION

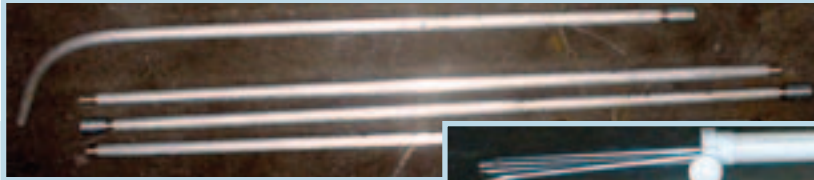

Safety Line Installation Tool

(4) 40" sections are packed in a PVC carrying case and are easily assembled into a safety line installation tool up to 13' long.

#SLT1067

**Install
Safety Line
Before Entering
Hoistway!**



75' Safety Line

Double swaged with Kevlar sleeve. Standard length is 75' but can be made to order to any length. Please specify length when ordering.

#SC1165



Tractel[®] Wire Rope Grab

This rope grab is designed to apply force evenly for maximum fall protection. Easy attachment - no clips or pins. Simply remove the carabiner and rotate. Made of stainless steel for use with 5/16" dia. wire rope. Caribiner is included; Meets ANSI and OSHA requirements

#RG501



Miller Wire Rope Grab

Maximum Capacity: 310 lbs. Meets ANSI A10.14, Z359.1, CSA Z259.2 and OSHA Requirements.

5/16" #MRG516

3/8" #MRG38



Rope Grab for Fiber Rope

Manual rope grab 5/8" or 3/4".

#8174

**Don't
put your
people at risk
of a fall or your
company at risk
of an OSHA
citing.**

E-MAIL sales@verticalsolutions.net