

STIHL® Cut-Off Concrete Machines


STIHL Cutquik® cut-off machines are built tough to match the requirements of today's busy contractors. For construction sites, demolition work, or rescue operations—these machines offer the power and portability needed for fast, easy cutting. A multistage air filter and the IntelliCarb™ system lets you cut longer between filter changes. Longer run time is accomplished through the IntelliCarb™ system that internally compensates the air/fuel ratio, lowers emissions and extends air filter life.

The air filtration system assures reliable operation even in dusty environments. Vibration dampening and ergonomic handle designs make cutting smooth and easy, and lessen operator fatigue. The ElastoStart™ handle system reduces the starting effort associated with high-compression engines like these.

4223 202 0010 14" Cut-off Machine - 64cc / TS400 (Wheel Not Included)

4223 202 0008 14" Cut-off Machine - 70-72cc / TS460 (Wheel Not Included)


4205 206 0004 14" Cut-off Machine - 95-111cc / TS 760 (Wheel Not Included)

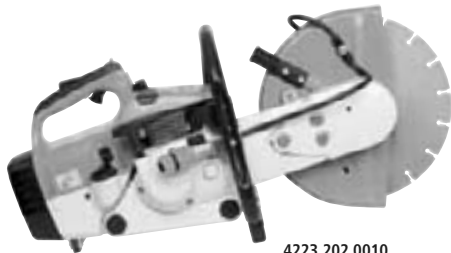

4223 202 0010



4223 202 0008

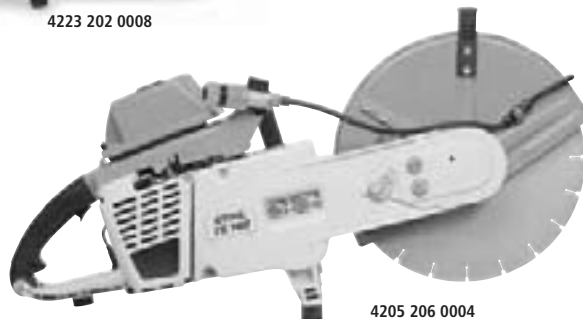

4205 206 0004

Two Wheel Cart

- For wet/dry cutting
- Reduces operator fatigue
- Attaches to all STIHL Cutquik® saws

Cutquik® Cart
4201 710 1403

- For STIHL models 510 & 760

Cart Water Tank Kit
4201 007 1008

Depth Wheel Kit
4201 007 1041



Two Wheeled Cart

Starter, Filters & Belts

1122 190 3400 ElastoStart™ Assy .

4221 140 1800 Inner Filter.

4221 140 4400 Micronic Filter-Main

4223 141 0300 Prefilter

4223 141 0600 Prefilter

4221 141 0310 Prefilter

4223 140 1800 Secondary Filter

9490 000 7851 V-Belt

9490 000 7850 V-Belt

9490 000 7892 Narrow V-Belt

If You Don't See It, Call And Ask About Our Special Order Program

TOLL FREE CALL 877-655-8164



CUT-OFF SAWS

PARTNER®




K700

14" Gas Saw 70cc K700/14

- The lightest 14" saw on the market
- Active Air Filtration™ increases filter life 3 - 5 times
- Durastarter™ reduces wear on the starter
- Easystart ensures 50% easier starting
- Easily adjustable blade guard makes it easier to work while cutting
- Longer Service Intervals with fewer filter replacements
- Smartcarb™ extends the filter 3 - 5 times

968 33 14-09

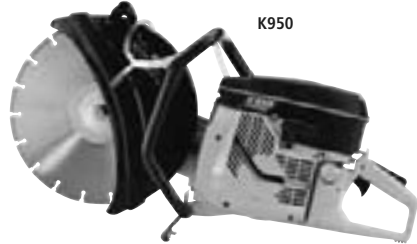

K950

14" Gas Saw 95cc K950/14

- The best power to weight ratio on the market
- Active Air Filtration increases filter life 3 - 5 times
- Durastarter reduces wear on the starter
- Easystart ensures 50% easier starting
- Easily adjustable blade guard makes it easier to work while cutting
- Available in 12", 14", 16"

968 30 14-09



K3000

14" Electric Saw K3000/14

- Capacity for a 14" blade (5" cutting depth)
- Forward rotation reduces the risk of jamming and kickback
- Elguard™ advanced overload protection pulsates the saw before overload
- Softstart™ gives the saw a gradual start when pulling the trigger
- Comfortable front and rear handle placement

968 38 64-00



Cart collapses for easy transport.

506 29 54-03 Cart
506 29 55-02 Water Tank

Cart & Water Tank

- Two wheel cart with depth wheel holds all gas models

KV03 Cart
506 29 54-03

Water Tank 4 Gal. w/Wet Cut Kit
506 29 55-02

Belts, Filters & Starter Assembly

- V-belt for K950 12"/14" saws
506 07 05-03
- V belt for K650 & K700 Active III saws
506 07 05-06
- Pleated paper filter for K700//K650
506 22 42-01
- 3 layered foam oil filter for K700/K650
506 22 63-01
- Pleated paper filter for K950
506 23 18-01
- 3 layer oil saturated foam filter for K950
506 23 19-01

Starter Assembly K950

- Complete starter assembly
506 23 59-03

2 Cycle Oil

- 2-Cycle Oil (50:1)
 - 48 bottles per case
- 531 03 17-44 2.6 oz Bottle Case .





ICS®



Concrete Chain Saw

- Cuts up to 12" deep; nearly 3X traditional 14" circular blade
- Square corners with no over-cut, ideal for square, rectangular and pipe openings
- Cuts aggregate based material including reinforced concrete, brick, block, and stone
- 80 cc 2 stroke engine develops 5.7 hp. Weighs only 21 lb. with bar and chain
- Safe to operate, no "kick-back". Wet cut only, no hazardous dust
- Can cut openings as small as 4" x 4", also capable of irregular shape openings

71995 613GC-12

Concrete Chain Saw

- Base model cuts up to 14" deep. A 16" deep cutting bar and chain also available
- Cuts square corners with no over-cut like circular blades
- Cuts aggregate based material including reinforced concrete, brick, block, and stone
- 101 cc 2 stroke engine develops 6.5 hp. Weighs 27.5 lb. with bar and chain
- Safe to operate, no "kick-back". Wet cut only, no hazardous dust
- Ideal for irregular shaped holes, cuts concrete pipe, minimizing patchwork

71843 633GC-14



TARGET

Target MC18

- Available with a 9 or 13 HP Honda engine
- 18" standard blade capacity
- Dual arbors allow mounting of blade on either end of the blade shaft for right or left side cutting
- Blade shaft features hard case treatment for strength and rust resistance.
- Screw feed raises/lowers the blade into and out of the cut, giving the operator better control of the blade
- One-piece box type steel frame reduces vibration from the blade, increases production, reduces component wear and extends saw life
- Adjustable handlebars for operator comfort and easy maneuvering

Target C00087

TARGET



TA10100 10" Tile Saw

- 10" blade capacity
- Max. diagonal cut: 12", Max. depth of cut: 3-3/4"
- Arbor diameter: 5/8"
- 1-1/2 HP high torque motor, 115V, 14.6 Amps, 60Hz
- Premium 6 groove poly V-belt that drives the blade with less vibration and more power
- Steel powdered coated sliding pan is lightweight and durable
- Flip-up blade guard
- Weight: 105 lbs.

Target Tile Saw
TA10100

clipper



BBM307 Compact Masonry Saw

- Weighs only 70 lbs.
- Max blade diameter 14", Max. depth of cut 4-5/8"
- Low amperage, high horse power, dust-resistant motor
- Rigid all-steel unibody construction provides the best weight to strength ratio in its class
- Pivoting head with depth lock allows cutting of material up to 8" thick
- Wet or dry cutting capability

Clipper Masonry Saw
70184600684

clipper



C13P18 Compact Concrete Saw

- Cut wet or dry asphalt and concrete
- Combines economy and high performance
- Cutting depth up to 6-1/2"
- Positive continuous screw feed depth control with hand wheel
- Stay level frame design keeps handle bars at optimum height when cutting at any depth
- Newly designed heavy-duty frame reduces vibration to a minimum, increasing machine life and operator comfort
- Water tank adds additional ballast and cutting performance without obscuring the view of the cutting operation
- Maximum blade size 18"
- Weight: 218 lbs.

Clipper Floor Saw
70184600913

If You Don't See It, Call And Ask About Our Special Order Program